




Throttle lever acts as fuel-cutoff



Multi air cleaner for extd. maint.



Reduced shock vs. competitors

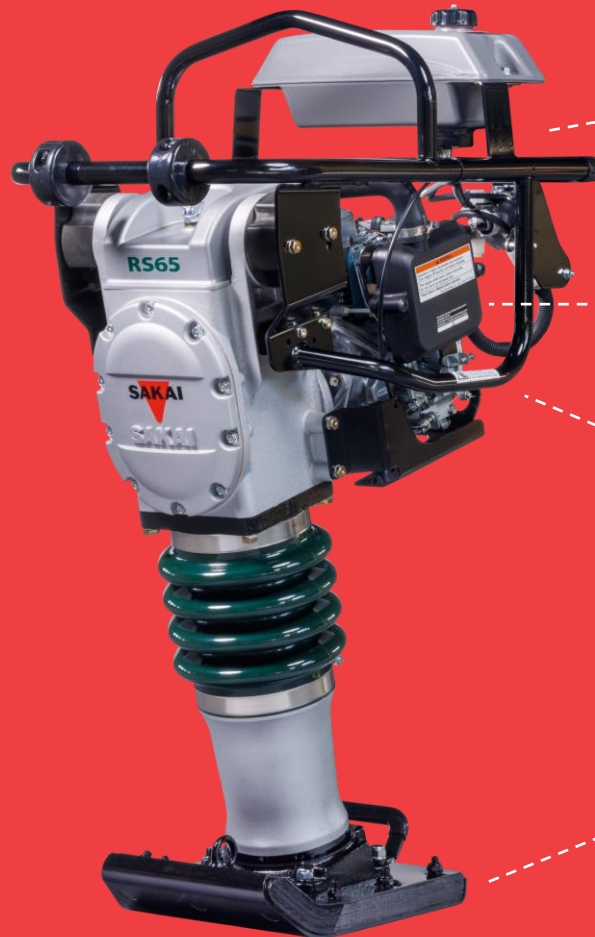


Superior ground visibility (no plastic covers)

2.8 HP Honda engine

Steel cage mitigates drop damage

Shoe with tapered front corner

| Specs: | | RS65 | Optional Accessories: |
|---------------------|--|---------------------------------|---|
| Shoe Size | | 11"x 13.4" (280 x 340 mm) |  <p><i>6" Trench Foot for electrical/plumbing trenches</i></p> |
| Operating Weight | | 152 lbs (69kg) | |
| Vibration Frequency | | 648-690 vpm (10.8-11.5 Hz) | |
| Impact Force | | 3,375 lbs (15 kN) | |
| Ramming Stroke | | 2"-2.8" (50-70mm) | |
| Engine | | Honda GX100 2.8 HP (2.1 kW) | |
| Warranty | | 1 YR Full Machine / 2 YR Engine | |

Reliable. Easy-to-Use. Durable.