




Throttle lever acts as fuel-cutoff



Multi air cleaner for extd. maint.



Reduced shock vs. competitors

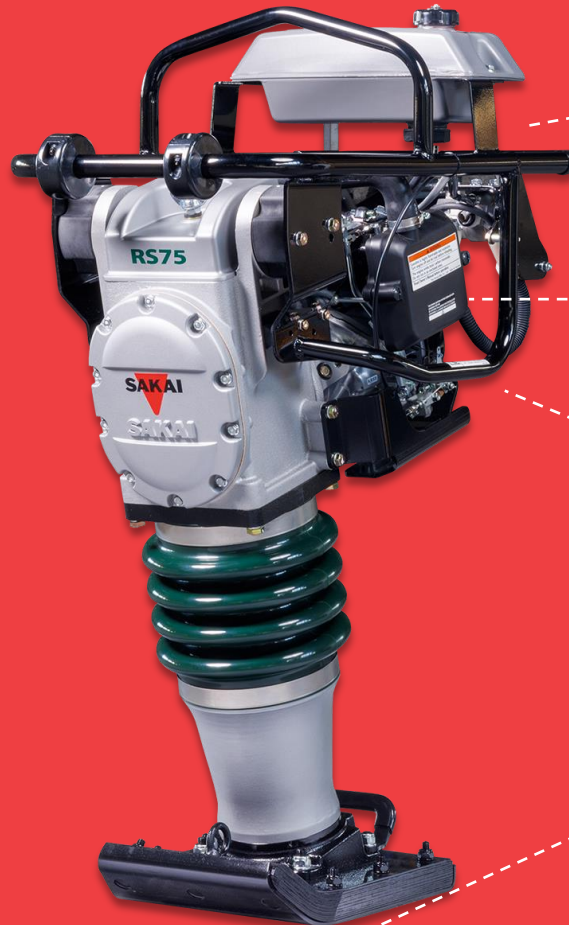


Superior ground visibility (no plastic covers)

3.6 HP Honda engine

Steel cage mitigates drop damage

Shoe with tapered front corner

Specs:	RS75	Optional Accessories:
Shoe Size	11"x 13.4" (280 x 340 mm)	 <p><i>6" Trench Foot for electrical/plumbing trenches</i></p>
Operating Weight	165 lbs (75kg)	
Vibration Frequency	648-690 vpm (10.8-11.5 Hz)	
Impact Force	4,050 lbs (18 kN)	
Ramming Stroke	2"-2.8" (50-70mm)	
Engine	Honda GXR120 3.6 HP (2.7 kW)	
Warranty	1 YR Full Machine / 2 YR Engine	

Reliable. Easy-to-Use. Durable.